


REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 1992	3. REPORT TYPE AND DATES COVERED Final Report	
4. TITLE AND SUBTITLE Ionospheric Predictions Undertaken as Part of a Study of O and M Radar Performance			5. FUNDING NUMBERS F6170892W0350	
6. AUTHOR(S) Prof Tudor Jones				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Leicester Department of Physics University Road Leicester LE1 7RH, England			8. PERFORMING ORGANIZATION REPORT NUMBER SPC-92-4011	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) EOARD PSC 802 BOX 14 FPO AE 09499-0200			10. SPONSORING/MONITORING AGENCY REPORT NUMBER SPC-92-4011	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The aim of the study was to examine the influence of ionospheric propagation conditions on the performance of ROTHR type radar installations. Possible sites for locating the radars was specified as was the viewing area of interest. The final objective of the study was to determine the comparative sensitivity over the full beam width for ranges between 1000 and 3000 km from the radars. The ionospheric models were to represent conditions of low, medium and high sun spot numbers and include the normal diurnal and seasonal variations of the ionosphere. After discussions with the sponsors, the parameters required to specify the system performance were identified and the program divided into two work packages which were to be undertaken at Leicester and RSRE respectively. The work at Leicester involved the calculation of the ionospheric propagation conditions and of the expected signal strength and mode structure. A number of transmitter sites were considered by sponsors and they specified that the initial studies were to be made assuming the radars were located at Grand Fork and Bakersfield. The initial calculations for these two sites were presented at a meeting with the sponsors on 25/26 September 1991. A draft report was produced in October and the final report on the joint work, which included four specified sites and full details of the expected coverage from these sites was submitted to the sponsors by RSRE at the end of 1991.				
14. SUBJECT TERMS			15. NUMBER OF PAGES 6	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	



FORMALITY INSPECTED 2

**Final Report: On Ionospheric predictions undertaken as part of a
study of O and M radar performance (Ref:SPC-92-4011).**

1. Introduction.

The aim of the study was to examine the influence of ionospheric propagation conditions on the performance of ROTHF type radar installations. Possible sites for locating the radars were specified as was the viewing area of interest. The final objective of the study was to determine the comparative sensitivity over the full beam width for ranges between 1000 and 3000 km from the radars. The ionospheric models were to represent conditions of low, medium and high sun spot numbers and include the normal diurnal and seasonal variations of the ionosphere. After discussions with the sponsors, the parameters required to specify the system performance were identified and the programme divided into two work packages which were to be undertaken at Leicester and RSRE respectively.

The work at Leicester involved the calculation of the ionospheric propagation conditions and of the expected signal strength and mode structure. A number of transmitter sites were considered by the sponsors and they specified that the initial studies were to be made assuming the radars were located at Grand Fork and Bakersfield. The initial calculations for these two sites were presented at a meeting with the sponsors on 25/26 September 1991. A draft report was produced in October and the final report on the joint work, which included four specified sites and full details of the expected coverage from these sites was submitted to the sponsors by RSRE at the end of 1991.

2. Initial Investigations.

Coordinates of the notional target points at the required bearings and ranges for the two sites were supplied to Leicester by RSRE. For each transmitter site there were three bearings, these being the boresight and $\pm 30^\circ$ on either side of the boresight. For each boresight five ranges were specified, ie. 1000, 1500, 2000, 2100 and 3000 km. The frequencies of interest were also specified. This information enabled the propagation parameters to be calculated at Leicester using the IONCAP, ionospheric prediction programme. This programme is extensively employed by many agencies for evaluating HF propagation conditions. In the present study, the conditions were calculated for the sites and ranges specified by the sponsor as indicated above.

For each nominal target point, calculations were made as follows:-

- (a) At four hourly intervals throughout the day (ie. 00, 04, 08.....20,24 LT).
- (b) For three sun spot number values (10,75,150).
- (c) For the months June, September and December
- (d) Frequencies of 5, 6, 8, 10, 12, 16, 20, 24, 28 MHz inclusive.

Isotropic models of the antenna gain patterns were employed throughout so that the ionospheric loss could be evaluated. Later, realistic models of antenna gains were applied to the data by RSRE for each frequency and elevation angle. Some changes were made to the IONCAP programme so that only those parameters required by RSRE to determine the system performance were printed out.

3. Discussion of the initial investigations.

A meeting was held at Leicester on 17 September to discuss the incorporation of the predicted field strengths into the Radar Equation calculation. Attention was given to the noise models employed in the prediction programme since the ambient noise level greatly influences the signal to noise ratios that can be achieved with a given radar system. It was agreed that the CCIR (CCIR report 322-2) models employed in the prediction calculations were acceptable and two noise levels 'Remote' (-164 db) and 'Rural' (-148 db) were thought to be representative of the sites under consideration.

In order to determine the ray paths to the target areas, additional calculations were undertaken using a 'ray tracing' analysis. This was the Jones 3D ray tracing package which is extensively employed for modelling studies of this kind. In view of the complexity of this analysis, the calculations were restricted to the azimuths and ranges of primary interest (ie. the boresight site and ranges between 1000 to 3000 km). The ray tracing study confirmed the mode type and elevation angles necessary for the required coverage. The calculations also confirmed the MUF and LUF expected for different times of day, season and sun spot number. Ray plots were generated for all frequencies and an example of the graphical output obtained is reproduced as figure 1.

These initial results were presented at a meeting held at Leicester on 26 September and were very well received. At this meeting two additional transmitter sites were

added to those originally specified. These were Norfolk, Virginia, and Kingsville, Texas.

Summary of Prediction effort

For each of the transmitter sites 3 bearings and 5 ranges were specified, ie. 15 nominal target points for each site. Calculations were required for all of these at four hourly intervals (ie. 6 times), for 3 sun spot numbers and for 3 months (seasons). This produced an output of 540 sides on the lazer printer. Each output page gives the **propagation mode, elevation angle and transmission loss** for each of the 9 frequencies and for the 4-hourly intervals. An example of an output page is reproduced as figure 2.


In addition, predictions of absorption loss, comprising 10 pages each were obtained for:-

Site 1	Boresight	range 2000 km	'remote' noise model
Site 1	Boresight	range 1500 km	'remote' noise model
Site 1	Boresight	range 2000 km	'rural' noise model
Site 1	Boresight	range 1500 km	'rural' noise model

ie: in all 40 pages of output. A specimen page of this output is reproduced in figure 3. In addition, several short runs were made for comparison and discussion purposes.

All the data were produced on schedule and supplied to RSRE in the agreed format. The data were employed by RSRE for determining the system performance by means of their radar cross section analysis technique. A special section on the prediction calculations was written for the final report and this was duly included. (see Appendix 1 and 3 of the Final Report). Extensive discussions took place with RSRE during the analysis and in the drafting of the final report which was delivered to the sponsor at the end of 1991. All computer output was supplied to RSRE who still hold these data. All the data generated at Leicester are included in the analysis presented in the Final Report.

**** site 1, bearing 2, June, sun spot no 75, local noon ****

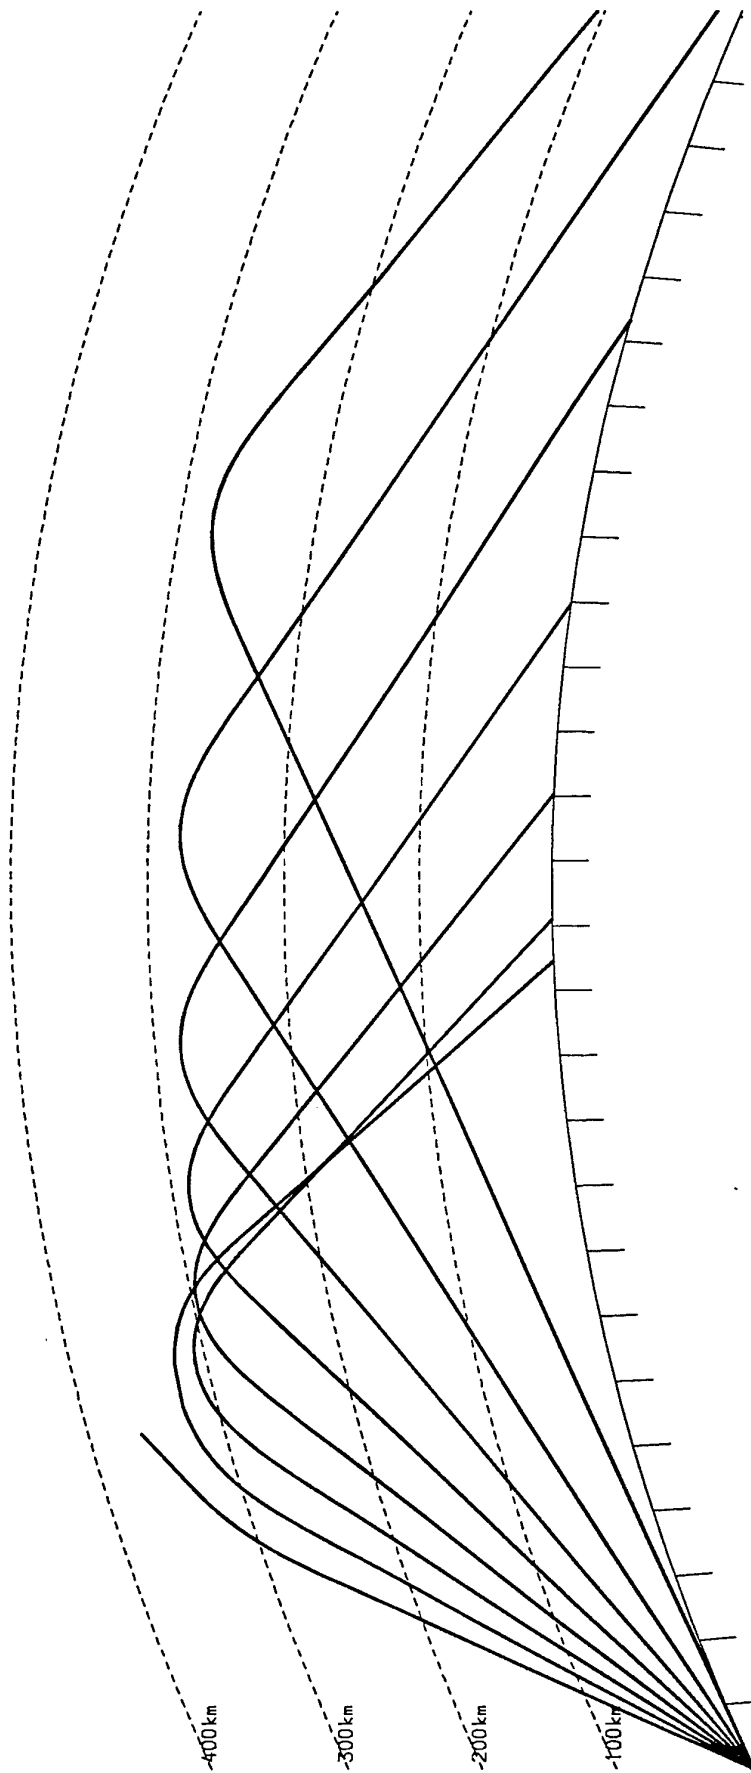

Frequency is 12.00MHz, Azimuth is 111.00, Mode is ORDINARY
100.00km between Tick Marks along earth surface

the ionospheric parameters used are:-
7.10 341.30 50.00 1.00 0.00 0.00 0.00 0.00

FIGURE 1

transmitter	36.00 N	119.00 W
target point	23.00 N	92.00 W

```
year      1992
month     JUN
sunspot   10.
```

bearing 111.7
great circle distance km 2971.

UT	MUF													
4.0	17.3	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	-	-	MODE	
	6.9	2.4	2.2	2.2	2.4	2.7	4.3	6.9	6.9	6.9	-	-	ANGLE	
	145.	137.	137.	139.	138.	136.	138.	162.	208.	269.	-	-	LOSS	
UT	MUF													
8.0	11.2	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	1F2	1F2	1F2	1F2	1F2	2ES	2ES	1F2	1F2	-	-	MODE	
	7.5	2.8	2.9	3.4	4.5	7.5	5.0	5.0	7.5	7.5	-	-	ANGLE	
	139.	130.	131.	133.	134.	145.	172.	205.	298.	299.	-	-	LOSS	
UT	MUF													
12.0	12.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	2 E	2F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	-	-	MODE	
	7.5	4.4	15.9	3.4	3.7	7.5	7.5	7.5	7.5	7.5	-	-	ANGLE	
	144.	143.	145.	138.	136.	144.	172.	222.	281.	310.	-	-	LOSS	
UT	MUF													
16.0	18.2	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	2ES	2ES	2 E	2 E	2 E	1F2	1F2	1F2	1F2	-	-	MODE	
	8.3	5.0	5.0	4.1	4.4	4.9	6.9	8.3	8.3	8.3	-	-	ANGLE	
	149.	202.	190.	169.	159.	157.	144.	161.	209.	277.	-	-	LOSS	
UT	MUF													
20.0	19.2	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	2ES	2ES	2 E	2F2	2F2	1F2	1F2	1F2	1F2	-	-	MODE	
	9.6	5.0	5.0	3.9	22.9	20.7	9.0	9.6	9.6	9.6	-	-	ANGLE	
	152.	254.	230.	198.	167.	162.	147.	154.	180.	226.	-	-	LOSS	
UT	MUF													
24.0	21.3	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ	
	1F2	2 E	2 E	2 E	2F2	1F2	1F2	1F2	1F2	1F2	-	-	MODE	
	7.2	4.0	4.2	4.6	14.3	2.6	2.6	4.2	7.2	7.2	-	-	ANGLE	
	149.	163.	156.	151.	150.	142.	140.	142.	163.	200.	-	-	LOSS	

FIGURE 2

FIGURE 3

IONOSPHERIC COMMUNICATIONS ANALYSIS AND PREDICTION PROGRAM - IONCAP VERSION 85.04

	1	2	3	4	5	6	7	8
	1234567890123456789012345678901234567890123456789012345678901234567890							
METHOD	20	1						
COMMENT		2	3	4	5	6	7	
COMMENT	123456789012345678901234567890123456789012345678901234567890123456789							
CIRCUIT	3600N	11900W	3000N	10500W				
LABEL					0			
SYSTEM	500.0	-3.2	0.0	90.10	0.0	8.50		
MONTH	1992	3	6	9	12			
SUNSPOT	75.							
TIME	4	24	4	0				
FREQUENCY	5.00	6.00	8.00	10.00	12.00	16.00	20.00	24.00
ANTENNA	1	1220.00	0.0100	10.		0.00		
ANTENNA	2	12	0.00	0.0100	10.	0.00		30.00 1
EXECUTE	0							30.00 1
COMMENT		2	3	4	5	6	7	
COMMENT	12345678901234567890123456789012345678901234567890123456789							
QUIT								

1

METHOD 20 IONCAP 85.04 PAGE 1

MAR 1992

SSN = 75.

36.00 N	119.00 W	- 30.00 N	105.00 W	113.11	300.77	N. MI.	KM
						790.5	1463.9
				MINIMUM ANGLE	2.0	DEGREES	

ITS- 1 ANTENNA PACKAGE

XMTR 1.0 TO 30.0 CONSTANT GAIN

H 0.00 L 0.00 A 0.0 OFF AZ 20.0

RCVR 1.0 TO 30.0 CONSTANT GAIN

H 0.00 L 0.00 A 0.0 OFF AZ 0.0

POWER = 500.000 KW 3 MHZ NOISE = -148.0 DBW REQ. REL = .90 REQ. SNR = 10.0

MULTIPATH POWER TOLERANCE = 10.0 DB MULTIPATH DELAY TOLERANCE = 0.850 MS

UT MUF

4.0	11.7	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ
	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	-	-	MODE
22.0	16.1	16.1	16.6	17.9	24.0	24.0	24.0	24.0	24.0	24.0	-	-	ANGLE
5.5	5.3	5.3	5.3	5.4	5.7	5.7	5.7	5.7	5.7	5.7	-	-	DELAY
356.	263.	263.	271.	291.	390.	390.	390.	390.	390.	390.	-	-	V HITE
0.50	1.00	0.99	0.93	0.75	0.45	0.02	0.00	0.00	0.00	0.00	-	-	F DAYS
111.	102.	102.	103.	106.	114.	143.	192.	219.	221.	221.	-	-	LOSS
79.	78.	78.	79.	79.	72.	45.	-2.	-27.	-27.	-27.	-	-	DBU
-48	-42	-44	-45	-47	-56	-86	-134	-162	-163	-163	-	-	S DBW
-160	-148	-150	-154	-157	-161	-166	-170	-172	-174	-174	-	-	N DBW
111.	105.	106.	108.	109.	105.	81.	36.	11.	11.	11.	-	-	SNR
-83.	-87.	-89.	-90.	-90.	-72.	-45.	0.	6.	6.	6.	-	-	RPWRG
1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.90	0.55	0.59	0.59	-	-	REL
0.00	1.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	-	MPROB
1.00	1.00	1.00	1.00	1.00	0.99	0.91	0.49	0.30	0.31	0.31	-	-	S PRB
17.	1.	2.	3.	7.	21.	25.	25.	1.	1.	1.	-	-	SIG LW
8.	5.	5.	5.	5.	10.	25.	25.	15.	4.	4.	-	-	SIG UP
79.	78.	78.	79.	79.	72.	45.	41.	41.	41.	41.	-	-	VHFDBU
17.	1.	2.	3.	7.	21.	25.	6.	6.	6.	6.	-	-	VHF LW
8.	5.	5.	5.	5.	10.	25.	8.	8.	8.	8.	-	-	VHF UP
F	F2	F2	F2	F2	F	F	F	F	F	F	-	-	VHFMOD
19.	8.	7.	8.	10.	22.	26.	26.	7.	7.	7.	-	-	SNR LW
11.	10.	10.	9.	9.	12.	26.	26.	17.	10.	10.	-	-	SNR UP

8.0	9.7	5.0	6.0	8.0	10.0	12.0	16.0	20.0	24.0	28.0	0.0	0.0	FREQ
	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	1F2	-	-	MODE
23.6	17.2	17.5	18.9	25.0	25.0	25.0	25.0	25.0	25.0	25.0	-	-	ANGLE
5.6	5.3	5.3	5.4	5.7	5.7	5.7	5.7	5.7	5.7	5.7	-	-	DELAY
382.	280.	285.	306.	408.	408.	408.	408.	408.	408.	408.	-	-	V HITE
0.50	1.00	0.98	0.83	0.42	0.08	0.00	0.00	0.00	0.00	0.00	-	-	F DAYS
109.	100.	101.	103.	112.	128.	184.	214.	215.	217.	217.	-	-	LOSS
79.	79.	80.	79.	72.	58.	4.	-24.	-24.	-24.	-24.	-	-	DBU
-47	-41	-42	-44	-54	-70	-127	-156	-158	-159	-159	-	-	S DBW
-157	-145	-148	-153	-158	-162	-167	-170	-172	-174	-174	-	-	N DBW
110.	104.	105.	108.	104.	92.	40.	14.	15.	15.	15.	-	-	SNR
-84.	-87.	-88.	-90.	-75.	-56.	-5.	3.	2.	2.	2.	-	-	RPWRG
1.00	1.00	1.00	1.00	1.00	1.00	0.93	0.76	0.80	0.83	0.83	-	-	REL
0.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	-	MPROB
1.00	1.00	1.00	1.00	1.00	0.96	0.55	0.37	0.39	0.41	0.41	-	-	S PRB
15.	1.	2.	5.	18.	25.	25.	1.	1.	1.	1.	-	-	SIG LW